

Major renovation project on a accommodation platform in the North Sea



CUSTOMER


Leading offshore operator in the North Sea

THE PROJECT

Background: Offshore crew observed that joint around drainbox in Galley where in bad condition and leaking. An offshore inspection show water in floor construction in a large part of lev. 1 - Galley, Mess room, corridor, laundry, cooler/freezer room, and dry provision.

WE ASSIST ON

- Investigation; Offshore investigation & clarification, mould & water damage reports, scope clarification & tender/project description
- Project preparation; work prepare, permit preparation, POB & project plans, contract management of subcontractors, purchasing & packing materials & tools.
- Project execution;
 - Project management 24/7 during offshore execution
 - Established A60 floors by subcontracting professional floor specialist
 - Installed new toilets included sewage, drain & water supply
 - Installed new ceilings, lights, hatches & doors
 - Installed new distribution panels in Galley
 - Installed compressor unit
 - Installed new cooler/freezer room
 - Installed new galley hoods incl. exhaust fan & ducting filters
 - Installed new and old galley equipments, furnitures & kitchen machines
 - Permit and PIMS
 - Daily report to the customer
- Final documentation and project close out

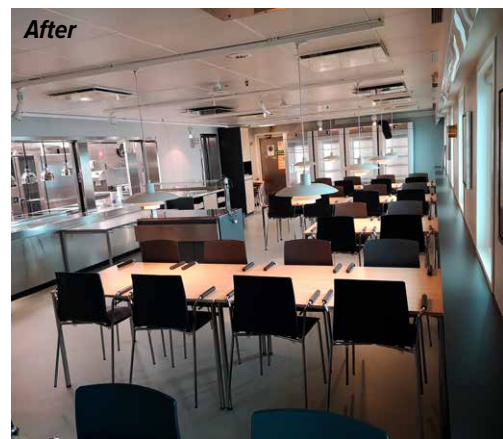

Offshore hours estimated vs. used:
5340 >> 5212

Maximum people offshore under project:
24

Total offshore days:
57

Concrete used:
17 tons